



230<sub>VAC</sub>

# BULL6M



## RESIDENTIAL USE

with integrated control unit and receiver personalised release key



**up to 600 kg**



### CONTROL UNITS:

**BULL6M** ——— CP.CORE

**BULL6ME** ——— CP.CORE





## 230 Vac

- Electromechanical 230 Vac geared motor with built-in control unit
- Optional encoder connection using MAG.E accessory
- The encoder device ensures crush prevention and precision in the gate moving phases
- Magnetic limit switches accessory available (MLS)



Reinforced foundation plate Dima included. Dimensions 326x164.5x2 mm, motor fixing distance 301x75 mm, 4 holes Ø 8.5 mm.

www.beninca.com

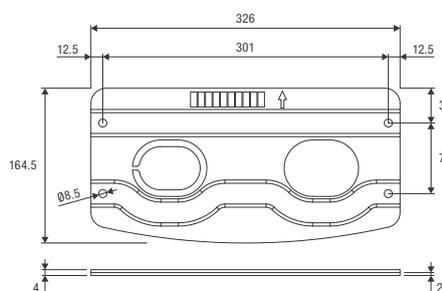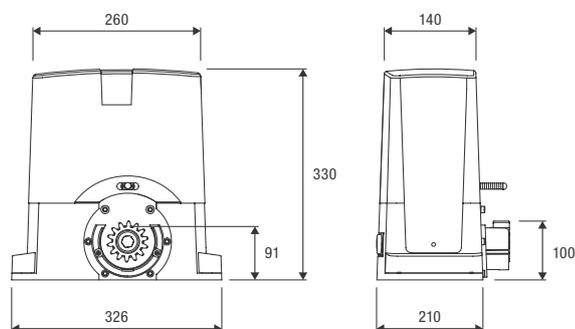

**BENINCA**

COMPLETE KITS	MOTOR	PHOTOCELLS	FLASHING LIGHT	TRANSMITTER
<b>KBULL6M</b>	1x <b>BULL6M</b>	1x <b>PUPILLA.T</b>	1x <b>LAMPY</b>	1x <b>TO.GO2VA</b>
<b>KBULL6ME</b>	1x <b>BULL6ME</b>	1x <b>PUPILLA.T</b>	1x <b>LAMPY</b>	1x <b>TO.GO2VA</b>



**RI.M4F**

M4 rack, to weld or attach with screws, 30x12x1000 mm slotted and galvanised. Supplied with M6 screws and threaded spacers. **Package of 4 pcs.**



**RI.M4F2**

M4 rack, to weld or attach with screws, 30x12x2000 mm slotted and galvanised. Supplied with M6 screws and threaded spacers. **Package of 1 pc.**



**RI.M4Z**

M4 galvanised rack to weld 22x22x2000 mm. **Package of 1 pc.**



**RI.M4ZF**

Galvanised slotted M4 rack 22x22x2010 mm for fastening to the side with the teeth. Supplied with M6 screws. **Package of 1 pc.**



**RI.M4P**

Nylon rack with steel core, to attach with screws, M4, 28x40x1000 mm. Slotted, provided with self-drilling screws. **Package of 10 pcs.**



**BULL.P-1**

Raised foundation plate. Height 34 mm. Floor fixing distance 353x117 mm, no. 4 Ø 11 mm. External dimensions 372x167 mm.



**BULL.P3**

Raised foundation plate. Height 34 mm. Floor fixing distance 260x117 mm, no. 4 Ø 11 mm. External dimensions 326x167 mm.



**SB.BULL8.F**

Externally fitted anti-intrusion cable unlock device (L=4.5m).



**MAG.E**

Magnetic encoder to detect obstacles and manage deceleration.



**MLS**

Magnetic limit switches. Suitable for snowy places.

**AUTOMATISMI BENINCÀ SpA** • Via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • sales@beninca.com

TECHNICAL DATA	BULL6M*	BULL6ME
Power supply	230 Vac (50-60Hz)	230 Vac (50-60Hz)
Motor supply	230 Vac	230 Vac
Max absorbed current	1.3 A	1.3 A
Max Thrust	650 N	650 N
Opening speed	10.5 m/min	10.5 m/min
Duty cycle	30%	30%
Protection level	IP44	IP44
Encoder	NO	YES
Operating temperature	-20°C /+50°C	-20°C /+50°C
Max gate weight	600 kg	600 kg
Driving gear for rack	M4 Z18	M4 Z18
Weight	11.3 kg	11.3 kg
Items no. per pallet	40	40
Kit weight	12.1 kg	12.1 kg
Kits no. per pallet	40	40

\* Available in 115 VAC version