



Products ▾

Assemble kit

 KeyPad Plus Jeweller

More ▾

Tech specs

BASELINE

KeyPad Plus Jeweller

Wireless touch keypad with support for encrypted contactless cards and key fobs



Device compatibility

Check

Communication

Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced anti-sabotage.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote control and configuration in Ajax apps.

Learn more 

Frequency bands

866.0–866.5 MHz

868.0–868.6 MHz

868.7–869.2 MHz

905.0–926.5 MHz

915.85–926.5 MHz

921.0–922.0 MHz

Depends on the sales region.

Maximum effective radiated power (ERP)

up to 20 mW

Automatic power control to reduce power consumption and radio interference.

Radio signal modulation

GFSK

Radio communication range

up to 1,700 m

Between the keypad and a hub (or range extender) in an open space.

Calculate the radio communication range at the facility >

Encrypted communication

All stored and transmitted data are protected by block encryption with a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

Learn more >

Key features

Sensor type

capacitive

Malfunctions and security mode indication

When KeyPad Plus is active, it notifies with an LED indication of the security mode, problems with detectors, or communication loss with the hub.

Functional button

Operates in one of the modes.

alarm

The system sends an alarm to the central monitoring station and users. It also activates the sirens connected to the system.

mute fire alarm

Mutes interconnected fire detectors alarms.

Learn more 

off

The button is disabled.


Control

codes

Pass cards

Tag key fobs

The functionality of the cards/key fobs is the same, but they differ in design.

Learn more about Pass 

Learn more about Tag 

Access via DESFire®

EV1, EV2

The technology is based on the ISO 14443 international standard and combines 128-bit encryption and copy protection.

Access codes

up to 200 personal codes

One code per each user. The number of personal access codes depends on the hub model.

1 keypad code

One code per KeyPad Plus

Duress codes

up to 200 personal codes

One code per each user. The number of personal duress codes depends on the hub model.

1 keypad code

One code per KeyPad Plus.

Codes for unregistered people

up to 99 personal codes

For people who are not registered in the system. The number of such codes depends on the hub model.

Group security management

Enter the general keypad code and the group ID to manage group security.

Recommendations

The device is designed for indoor use only.

Sabotage protection

Protection against code guessing

KeyPad Plus locks for 3-180 minutes if an incorrect code is entered more than 3 times in a row within 1 minute. The lock time is adjusted by PRO or user with admin rights in the Ajax app

Tamper alarm

Notifications on attempts to detach the keypad from the surface or remove it from the mounting panel.

Learn more 

Protection against spoofing

device authentication

Communication loss detection

after 36 s

Detection time depends on the Jeweller or Jeweller/Fibra settings.

Learn more 

Power supply

Batteries

4 × AA

Pre-installed.

Type

Type C

Calculated battery life

up to 3.5 years

Keypad's operating voltage range

2.25–3.3 V \equiv

Keypad's nominal operating voltage

3 V \equiv

Quiescent keypad's current consumption at nominal voltage

0.064 mA

Maximum keypad's current consumption at nominal voltage

165 mA

Full battery capacity

12,000 mAh

Low battery voltage

2.5 V_{min}

Low battery recovery voltage

2.7 V_{min}

End-of-life battery voltage

2.25 V_{min}

Device is switched off.

End-of-life battery capacity

500 mAh

Manufacturer

Huiderui

Energizer

Enclosure

Dimensions

165 × 113 × 20 mm

Weight


267 g

Operating temperature range

from -10 °C to +40 °C

Operating humidity

up to 75%

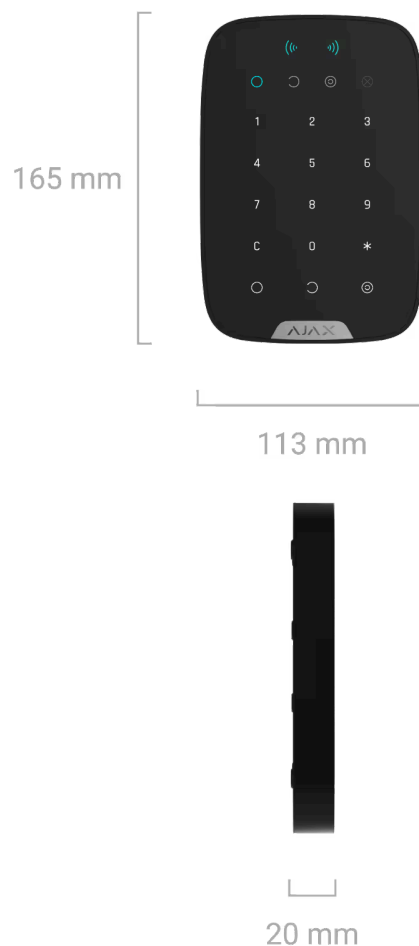

Colours

Black

White



Complete set

KeyPad Plus Jeweller

SmartBracket mounting panel

4 AA batteries (pre-installed)

Installation kit

Quick start guide

Certification and compliance with standards




KeyPad Plus Jeweller




Additional information

Compliance with standards


Learn more 

User manual

Learn more 

Warranty

24 months

Learn more 

Subscribe

Subscribe to our emails about secure life. No spam.

Subscribe

Request extra help

✉ support@ajax.systems

📍 @AjaxSystemsSupport_Bot

💬 Send a request



Rating 4.7

4,000,000

people worldwide under Ajax protection

💡 Suggest a feature



Products

Intrusion protection

Video surveillance

Fire and life safety

Comfort and automation

All products

Services

System integrations

Ajax Ready products

Fibra wired protocol

Ajax radio protocols

Software

For users

Ajax PRO: Tool for Engineers

Ajax Desktop

Ajax PRO Desktop

Ajax Translator PRO

Ajax Cloud Signaling

Scenarios



Available on
App Store



Available on
Google Play

Solutions

Support

[Customer stories](#)[Solutions by facility type](#)[Commercial fire detection and alarm system](#)[Upgrades and retrofits](#)[Why Ajax](#)[How it works](#)[Manuals and articles](#)[Compliance with standards](#)

Tools

[Ajax device compatibility](#)[Video storage calculator](#)[Video device calculator](#)[Battery life calculator](#)[Radio communication range calculator](#)[Switches and outlets configurator](#)[Fibra power supply calculator](#)[All web tools](#)

Connecting to CMS

[Intrusion alarm monitoring](#)[Video monitoring and visual alarm verification](#)[Audio alarm verification](#)

Company

[Blog](#)[About us](#)[Press page](#)[Events](#)[Career](#)[Ajax Next](#)[Students at CES 2026](#)[Reviews and feedback](#)

For partners

[For partners](#)[Ajax Academy](#)[Partner Portal](#)[🇷🇴 România](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#) [Anti-Spam Policy](#)[End user agreement](#) [Warranty](#)

© 2025 AJAX SYSTEMS CH. All rights reserved