

# Renton 650 PLUS

Compatible with your lifestyle

PN: UPCSBSL665TRPCG01B  
EAN: 6422956013301

## Specifications

<b>Capacity</b>	650 VA / 360 W
<b>Type</b>	Line Interactive
<b>Input</b>	
Nominal Voltage	230 VAC
Accepted Voltage Range	162-290 VAC
Frequency Range	60/50 Hz (auto sensing)
<b>Output</b>	
Nominal Voltage	230 VAC
AC Voltage Regulation (Batt. Mode)	±10%
Frequency Range (Batt. Mode)	60 Hz or 50 Hz ±1 Hz
Transfer Time	Typical 4 ms
Waveform (Batt. Mode)	Simulated Sine Wave
<b>Indicators type</b>	
AC Mode	Green lighting
Battery Mode	Yellow flashing every 30 seconds
<b>Low Battery</b>	Yellow and red flashing every 2 seconds
<b>UPS Fault</b>	All lights on
<b>Overload</b>	Red flashing every 0.5 second
<b>Alarm</b>	
Battery Mode	Sounding every 30 seconds
Low Battery	Sounding every 2 seconds
Overload	Sounding every 0.5 seconds
Fault	Continuously sounding
<b>Protection</b>	
Outlets type	4x Schuko Battery Backup 1 x USB type C (30W) 1 x USB type A (18W)
Full protection	Overload, Discharge & Overcharge protection, Overvoltage
Humidity	0-90 % RH @ 0-40°C (non-condensing)
Noise level	Less than 20dB



4 Schuko Outlets with Protection



Auto-Restart



Automatic Voltage Regulation



Low Noise


- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Simulated sine wave
- Off-mode charging
- Cold start function
- Compact size with local receptacles for easy use
- Simple and easy installation & operation
- USB fast charger (type C & type A)
- Low noise level

## Battery

Battery Type & Number	1x GP05122F PN: BTVACEUOATH2FCG01B
Typical Recharge Time	8 hours up to 90% capacity
Running time on battery (minutes)	25% Load - 18 min 50% Load - 6 min 75% Load - < 2 min 100% Load - < 1 min
<b>Physical</b>	
Product dimensions	165 x 87 x 267 mm
Product weight	3.96 kg



## Running time on battery

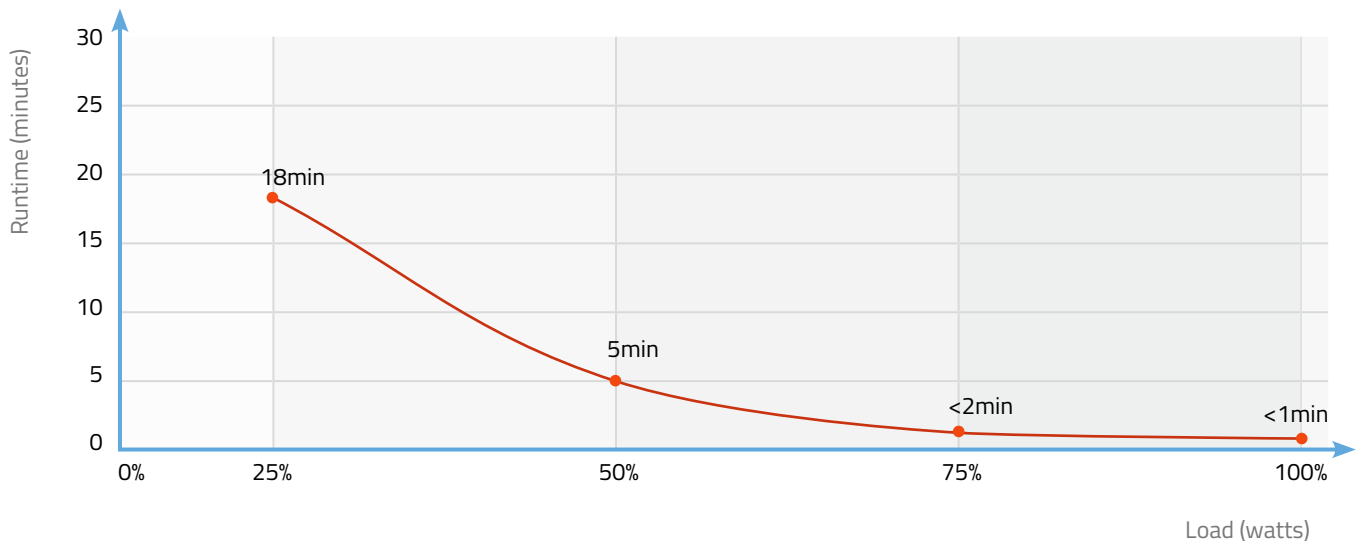

## Logistics

Carton Box Size (LxHxW)	546x 265x 330 mm
Pieces in the Carton Box	4
Net & Gross weight / CTN	NW: 15.84kg / GW: 17.28kg



## Certificates

RoHS  
2011/65/EU

