



S2-MF(V2)

Controler de acces standalone MIFARE 13.56 MHz

Imagine



YLI ETERNIT ACCES SRL
A.: HAIDUCULUI 3A, CLUJ-NAPOCA
T.: +40 264 484989
W.: www.yli.ro

S2-MF(V2)
Controler de acces standalone MIFARE
13.56 MHz
FISA TEHNICĂ

Descriere

S2-MF este un controler de acces, compact, pentru o singura usa, ce functioneaza cu cartele MIFARE 13.56 MHz avand o capacitate de pana la 2000 de carduri.

Foloseste un microcontroler Atmel care, impreuna cu un consum redus de energie, asigura o functionare stabila si de durata. Pentru a facilita programarea, vine echipat cu o telecomanda IR.

Caracteristici

- Un releu, programare cu telecomanda
- Poate citi carduri MIFARE 13.56 MHz
- Inrolare carduri in bloc
- LED-uri stare (verde si rosu)
- Anti-tamper optic, buzzer
- Deschidere usa temporizata (1-99 sec) sau permanenta
- Protectie la intemperii IP66
- Temperatura de functionare scazuta (-40°C)
- Anti-demontare
- Montaj interior/exterior


Specificatii

- | | |
|---------------------------|----------------------------|
| • Capacitate utilizatori: | 2000 |
| • Carduri compatibile: | MIFARE 13.56 MHz |
| • Distanța de citire: | 3-10 cm |
| • Conectori: | iesire releu, buton iesire |
| • Sarcina maxima releu: | 2A / 30V |
| • Material: | ABS, negru |
| • Tensiune de alimentare: | 9~24Vcc |
| • Consum: | 40 mA max. in repaus |
| • Temperatura: | -40°C ~ +60°C |
| • Umiditate: | 20-98 %, RH |
| • Dimensiuni: | 103(H) x 48(l) x 20(A)mm |
| • Masa bruta: | 150g |


Conexiuni electrice

Rosu - + 9~24 Vcc	Maro - COM
Negru - GND	Verde - NC
Galben - Buton iesire	Alb - NO


Montare

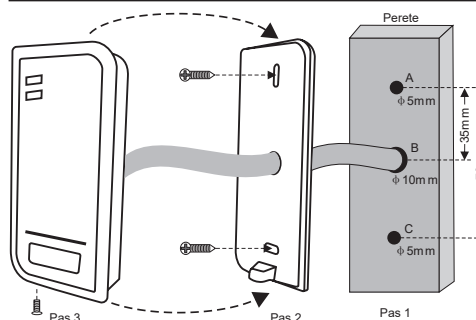


Scheme electrice

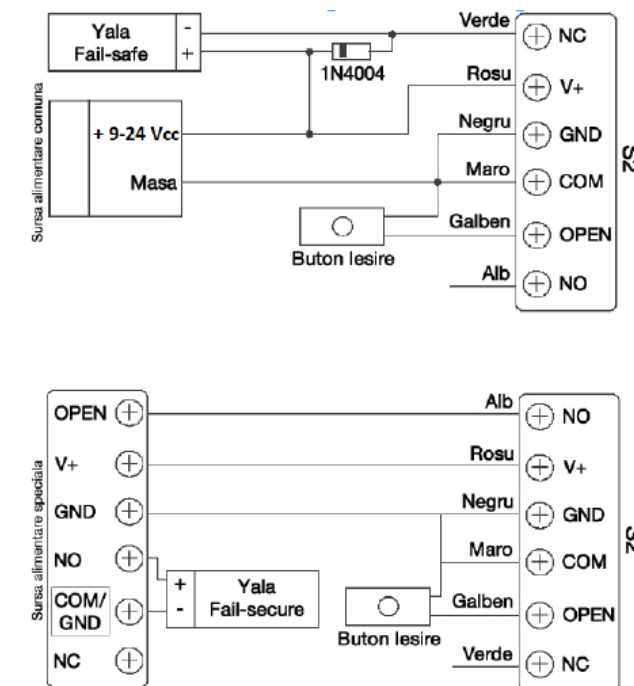

Continut pachet

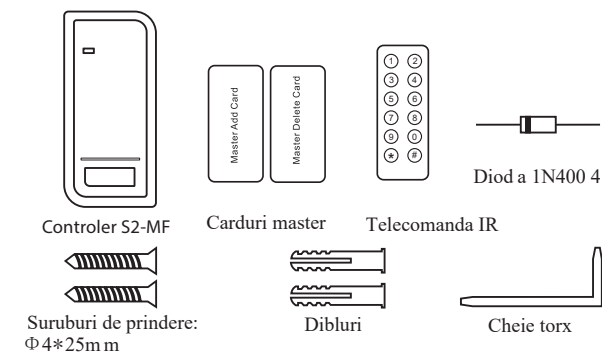

Observatii



EEE FAC OBIECTUL UNEI
COLECTARI SEPARATE